



EPOXY SAND ES 80

Dry quartz sand 0,3-0,8 mm

- ▶ For preparation of epoxy layers with the epoxy systems
- ▶ 100% washed, do not contain organic impurities
- ▶ Right grain sizes
- ▶ Excellent mechanical properties



PRODUCT DESCRIPTION Dry quartz sand for epoxy flooring of grain size 0,3-0,8 mm and natural colour. Fire-dried quartz sand are characterised by their high SiO₂ content and are free from organic impurities and other impurities, of high hardness, chemical resistance and appropriate grain size.

FIELD OF USE Ideal for mixing into epoxy resin for epoxy thin levelling, for epoxy mortars and also for increasing the mechanical strengths of every epoxy system. It is also suitable for broadcasting over fresh applied primer or thin layer epoxy system for increasing the slip resistance.

- PRODUCT PROPERTIES**
- For preparation of epoxy layers with the epoxy systems
 - 100% washed, do not contain organic impurities
 - Right grain sizes
 - Excellent mechanical properties



PRODUCT DATA

BASIC INFORMATION

Appearance crystal quartz sand

Packing 25 kg paper bags / 1000 kg (40x25 kg) on pallet

Storage and expiration date Store in original packaging onto dry place.

TECHNICAL DATA

Loss on ignition 0,25 (1000°C)

Humidity < 1 Ma.-%

DIN ISO 787,T2

Specific density 2,63 g/ml

Bulk density (naturally moist) compacted 1,6 g/ml

Bulk density (naturally moist) uncompacted 1,1 g/ml

Hardness (Mohs) 7

Sintering point > 1500°C


Softening point > 1700°C

CHEMICAL ANALYSIS

	mass-%
SiO ₂	97
Fe ₂ O ₃	0,04 %
Al ₂ O ₃	2 %
TiO ₂	0,2 %
CaO	0,02 %
MgO	0,01 %
Na ₂ O	0,05 %
K ₂ O	0,7 %

SIEVE ANALYSIS

Sieve (mm)	Total residue (%)
> 1	0,04
0,9	0,05
0,8	1,42
0,71	12,99
0,63	14,87
0,5	42,07
0,4	22,8
0,315	5,07
0,25	0,48
0,1	0,15
< 0,1	0,05

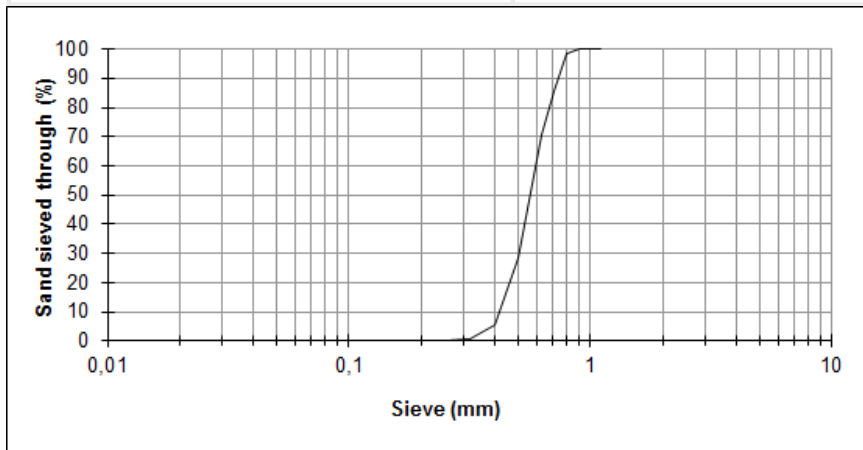



INSTRUCTIONS FOR USE

LIMITATIONS

Data source: All technical data in this technical sheet was obtained by laboratory research. Actual data may differ due to different working conditions.

Local restrictions: Due to specific local regulations the installed product can differ from country to country. For exact instructions for use a country specific technical sheet should be obtained.

LEGAL BASE

Information and recommendations related to use of KEMA products are presented in good faith and believed to be correct. The later is based on our knowledge and experience with the products. Information is supplied upon the condition that products are stored and used according to the recommendations and the persons receiving the same will make their own determination as to its suitability for their purposes prior to use. No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to Information or the product to which information refers. In no event will KEMA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon Information or the product to which Information refers. Nothing contained herein is to be construed as a recommendation to the use any product, process, equipment or formulation in conflict with any patent, and KEMA makes no representation or warranty, expressed or implied that the use thereof will not infringe any patent. All orders fall under current sales and supply conditions. The user should always check the latest technical sheet available upon demand.